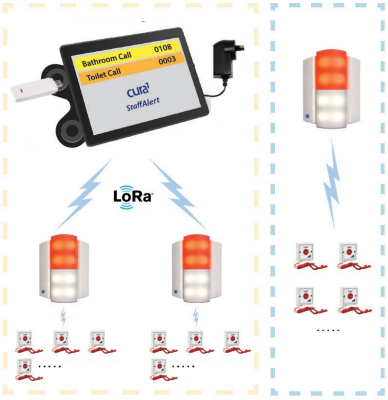
• Flexible, easily programmable alarm system. • Each Wireless Indicator Light can connect with up to 16 Wireless Waterproof Call Buttons. • The Touch Screen Console can receive from multiple Wireless Indicator Lights. • Receiver Dongle uses Long Range (LoRa) technology to increase the Console's wireless range up to 1.5km. • Call buttons are waterproof with a rating of IP65. • Wireless Indicator Lights can use both 12 AC power and batteries. • Wireless Buttons are supplied with a removable pull cord and batteries can easily be replaced.		Self Reset	**StaffAlert Wireless Call System Compatability Matrix** Suitable for private residences, care homes, disabled or public toilets and more. **What's in the box:** 1 x 2800 Touch Screen Console 1 x Quick Start Guide 1 x 2802 Receiver Dongle 1 x 2561 Wireless Indicator Light 1 x 2558 Call Button 1 x 2642 Caregiver Reset Key 1 x 2803 Wall Mount Bracket for Touch Screen Console 1 x 2404 12V Plug Pack	
				StaffAlert Wireless Call System
2800	Touch Screen Console			10" Android tablet touch screen interface. Centrally monitor alarms from multiple 2561 Wireless Indicator Lights.
2802	Receiver Dongle LoRa			Can receive LoRa signals from Wireless indicator lights up to 1.5 Km. Connects to the 2800 Touch Screen Console.
2803	Wall Mount Bracket For Touch Screen Console			Wall mounting bracket for the 2800 Touch Screen Console. Durable acrylic design.
2561	Wireless Indicator Light			Can receive alarms from up to 15 2558 Waterproof Call Buttons. Can forward calls to 2800 Touch Screen Consoles. Up to 1-year standard battery life (6 x Alkaline C Cell Batteries not included) Can be powered by 12Vdc.
2558	Wireless Waterproof Call Button w/pullcord	✔		Initiates alarm when RED button is pressed, or cord is pulled. Includes reset button. Waterproof to IP65. Includes replaceable batteries (2 x 3V Li-ion)

CM026-2

All radio frequency (RF) signal transmission and reception distances quoted are indicative only and based on testing carried out under ideal conditions. Actual transmission and reception distances may vary and be dependent on specific environmental conditions.

2404	12V Plug Pack			Plug Pack 12 V DC 2A. For 2561 Wireless Indicator Lights.
2642	Caregiver Reset Key			Caregiver Reset Key can be used to reset alarms.
2719	Cordless Pad Transmitter			Required by Cordless Pads / Mats. Sends a signal to the 2702 Monitor. ****1 year battery life. Replace the transmitter after one year****
2720	Universal Cordless Pad Transmitter			Required by Universal Pads / Mats if not connected via lead. Sends a signal to the 2702 Monitor. ****18 month battery life. Replace the transmitter after 18 months****
2900	DoorAlert+ Door Monitor	✓		Identifies when a resident approaches or exits a door if they are wearing a **2901 Wristband Transmitter**. ****See 2900 DoorAlert+ Compatibility Matrix for products required / optional****
2595	Wristband Alarm Transmitter			Staff or patients wear on the wrist. Use as a duress alarm or call button. Initiates alarm when **RED Button** is pressed. Reset on 3500R Monitor.

All radio frequency (RF) signal transmission and reception distances quoted are indicative only and based on testing carried out under ideal conditions. Actual transmission and reception distances may vary and be dependent on specific environmental conditions.

2698	Universal Transmitter	✓		Turn any third-party alarm device into a wireless transmitter. Can also be used as a wireless **door contact**. Togglable **Reset** button.
3502	ActiveCare Wireless Handset (Includes wall bracket)	✓		Initiates alarm when **RED button** is pressed. Includes **GREEN** wireless reset button or reset via 2700 Falls Monitor.
2700	6 Channel Cordless Falls Monitor	✓		Mount on a wall in or desk. Alarms on its seven-segment display and plays an audible adjustable tone. Can plug into a nurse call system. Reset on Falls Monitor will reset Pagers. ****See 6 Channel Cordless Falls Monitor Compatibility Matrix for products required / optional****

All radio frequency (RF) signal transmission and reception distances quoted are indicative only and based on testing carried out under ideal conditions. Actual transmission and reception distances may vary and be dependent on specific environmental conditions.