
LRCS Zone Repeater

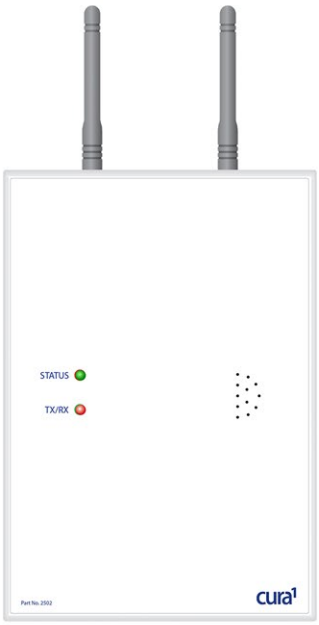

PART NUMBER: **2502**

FEATURES

Simple operation and maintenance

Affordable price

Fully transparent to all LRCS compatible equipment

Capable of monitoring up to 64 callpoint transmitters

Optional internal battery backup

TECHNICAL SPECIFICATIONS

12 to 13.8 Vdc operation 500 mA

Operating temperature: 5°C to 40°C

Relative humidity < 90%

Optional rechargeable 6 V lead acid internal backup battery

Operating frequencies: 916, 922.5 & 433 Mhz

Transmission strength 27 dBm range up to 500 m*

Dimensions: 210 x 150 x 45 mm

Net weight: 450 g (without batteries)

White durable ABS enclosure with plastic membrane front panel

FCCID Part 15.249, CFR47 (pending)

Medical Device Immunity: EN60601-1-2

Manufactured to ISO 9001: 2008, ISO 13485: 2003, ETL

Designed to UL 1069

ACCESSORIES

2404 Plug Pack 12Vdc 2A, **2501** LRCS Care Station, **2503** LRCS Combo Callpoint, **2504** Multi-Coloured Overdoor Light, **2508** Battery Pack, **2507** LRCS Waterproof Callpoint, **2552** DoorAlert Door Monitor, **2573** Wristband Duress Transmitter, **2596** Wireless Call Point with Reset & RJ10 Input, **2719** Cordless Pad Transmitter, **2720** Universal Pad Transmitter

cura1.com

*The range of wireless devices may vary and be dependent on your specifc environmental conditions.

cura¹ products are designed to augment well designed care programs and practices, cura¹ does not claim that any of its products are suitable as a substitute, or as a total solution for individuals that require care and constant supervision, and are at risk.

PM068a