# Wireless Indicator Light

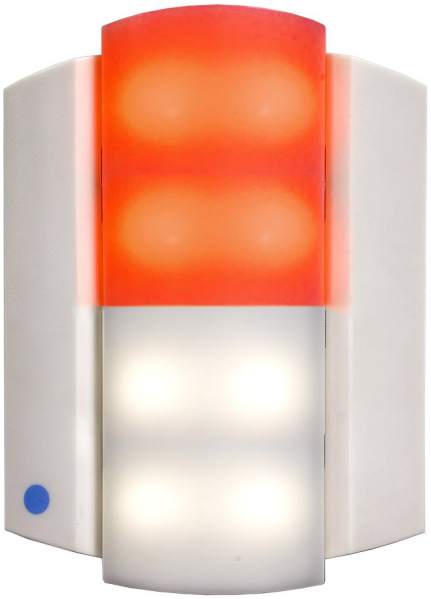

PART NUMBER: **2561**

## FEATURES

Dual coloured indicator for standard (red) and bathroom (white) events

Integrated buzzer with adjustable volume

LoRa signal bump to greatly extend range to central monitor for call points and mobile devices

Programmable group reset option

Memory capacity for 16 devices

Battery backup in case of power loss

Compatible with fully supervised systems for low battery and signal lost detection

Designed according to BS 8300-2:2018 guidance for barrier-free entry

## TECHNICAL SPECIFICATIONS

Operating frequency: 433 & 435 MHz (LoRa)

Signal Forward Range: 1.5 km (LoRa)*

Power requirements: 12 V DC, 800 mA and / or 6 x C-type batteries (included)

Battery life: 1 year

Dimensions: 16 x 11 x 6 cm

Housing material: durable ABS plastic

Net Weight: ~300 g (without batteries)

Operating temp.: 5°C to 40°C

Rel. humidity: < 85%

Standards:
EMC: EN 55022,
Radio: EN 300220-1 & 2, EN 301489-1 & 3
Alarm: EN 50130-4
FCC: FCCID-WNG-ILB-21

## ACCESSORIES

All **Cordless** Pads & Mats (using a **2719 or 2720** transmitter), **2721** iBeam, **2558** Wireless Call Button, **2802** Receiver Dongle LoRa, **2595** Wristband Alarm Transmitter, **3502** Wireless Handset, **2552** DoorAlert Door Monitor, **2404** Plug Pack 12 V, **2642** Reset Key

cura¹ products are designed to augment well designed care programs and practices, cura¹ does not claim that any of its products are suitable as a substitute, or as a total solution for individuals that require care and constant supervision, and are at risk.
*The range of wireless devices may vary and be dependent on your specific environmental conditions.