
# Recordable Voice Monitor

## (Secure Reset)

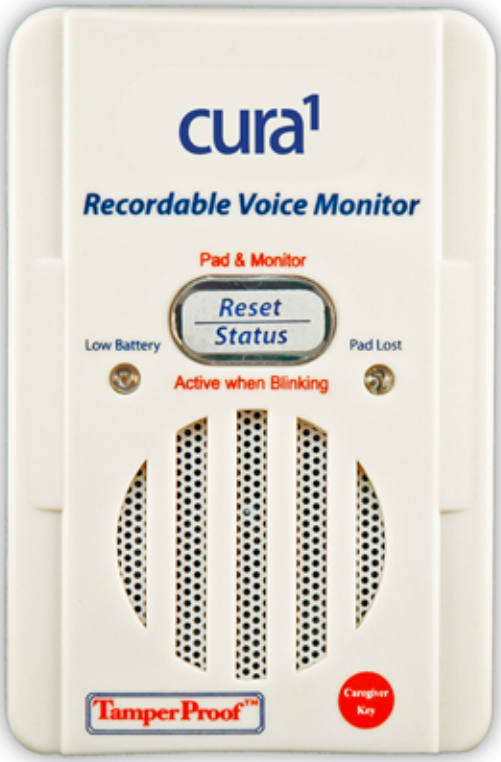


PART NUMBER: 2610

### FEATURES

Record your own alarm message. (15secs)
Simple operation and maintenance
Connects to all premium bed pads and chair pads
Floor mat sensor compatible
Affordable price
Alarm memory and auto re-arm
Caregiver Key reset option
Battery operated or optional external plug pack
Adjustable alarm volume and selectable tones
Adjustable delay
Low battery & lost pad indicator
Can be connected to a Nurse Call System

### TECHNICAL SPECIFICATIONS

9 Volt DC operation using either a 9V battery or 9V plug pack.
Dimensions 120 x 77 x 25 mm durable plastic enclosure.
Blue LED alarm indicator light.
Adjustable alarm volume
SPL 112 - 117db @ 10cm max volume
3 selectable alarm tones- voice only, tone only, voice & tone.
0 to 2 sec alarm delay option.
Volt free normally open and normally closed alarm output.
RJ11 type socket for bed pad connection with strain relief.
Low battery detection and indication.
Lost pad detection and indication.
Missing AC/DC supply detection and indication

### ACCESSORIES

**2626** Premium Bed Pad - 1 Year, **2627** Premium Bed Pad - 1 Year, **2634** Premium Bed Pad - 30 Days, **2628** Premium Wheelchair / Chair Pad - 1 Year, **2635** Premium Wheelchair / Chair Pad - 30 Days, **2633** Premium Heavy-duty non-slip floor mat - 1 year, **2637** Premium Heavy-duty non-slip floor mat - 1 year, **2636** Easy-release wheelchair / chair seatbelt, **2640** Metal mounting holder for fixing monitor to bed - 2 piece version, **2639** Metal mounting holder for fixing monitor to wall - 1 piece version, **2641** Soft plastic non-breakable cover, **2643** Nurse call Cable 2m, **2405** Plug Pack 9V DC 300ma

cura1.com

cura¹ products are designed to augment well designed care programs and practices, cura1 does not claim that any of its products are suitable as a substitute, or as a total solution for individuals that require care and constant supervision, and are at risk.